

# CS-01 Space Saver Compactors

The CS series CS-01 saves up to 1/3 in space & accommodates up to a 6 yard Front Load Container

## FEATURES

- Total unit UL/CUL listed
- Liquid limited capacity compactor/container
- 2 through 6 cubic yard front load container
- Remote Power Unit
- Large Charge Opening
- Low loading height for easy loading
- Optional chute fed systems available
- Fully (UHMW) guided & supported ram
- ANSI Z245.2 & ANSI Z245.21 Compliant

This compact combination offers a limited liquid sump trash containment system in a more compact size for space limitations. Designed to offer the same benefits of a larger unit with it's optional chute fed or hopper fed system.



Special modifications quoted upon request

## DESIGN FEATURES

- Rugged Construction provides long life
- Compaction ratios average 4 to 1, depending on material
- Excellent Compaction of dry and/or wet material
- Ideal for Restaurants, Fast Food locations, Shopping Centers, Supermarkets, Apartments, Hospitals, Schools, Nursing Homes, and hotels

## LOADING CAPABILITIES


- Load from ground, off a dock, or through the wall

## USER FRIENDLY

- CS-01 Container lid automatically unlocks when container is emptied and locks when returned

## SAFETY

- Door Safety Interlock
- Removable key for authorized operator usage

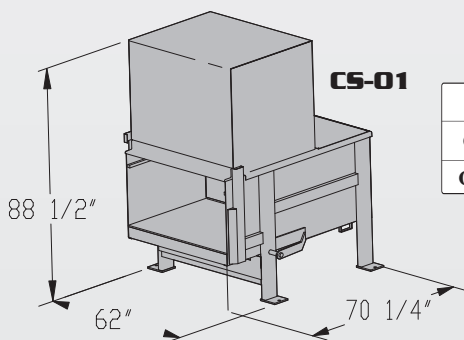

	CS-01 with container		
	2 yd	4 yd	6 yd
<b>OL</b>	111"	123"	140"
<b>OW</b>	81"	81"	81"

## Specifications

### CS-01 Specifications

#### GENERAL:

Dimensions	Length	70-1/4"
	Width	62"
	Height	88 1/2"
Clear Top Opening		35" L x 46" W
Load Height		49"
Cycle Time		58 seconds
Ram Force	Normal	28,900 lbs
	Maximum	32,300 lbs
Ram Penetration		11"
Ram Face Dimensions		47-3/4" W x 21" H
Weight		3000 lbs

#### CONSTRUCTION:

Chassis	Floor	1/2" Steel Plate 4" C-Channel
	Sides	3/16" Steel Plate 2" x 6" x 3/16" Steel Tube 4" C-Channel
	Presshead	Top 3/16" Steel Plate
Sides	Sides	1/4" Steel Plate
	Face	1/2" Steel Plate
	Bottom	1/2" AR Steel Plate
Guides	Guides	UHMW Pads
	Breaker Bar	4" x 4" x 3/4" Steel Angle

#### ELECTRICAL:

Motor	5 hp
Voltage	208-230/460 VAC 60 Hz Three Phase

#### HYDRAULIC:

Pump Type	Vane	
Pump Capacity	6 gpm	
Tank Capacity	12 gal	
Hydraulic Cylinder(2)	Bore	3-1/2"
	Stroke	34
	Rod	1-1/2"
Operating Pressure	Normal	1,750 psi
	Maximum	2,000 psi

All information is subject to engineering and/or other changes without notice.